Program Overview

ASCEM

PA Community of Practice Technical Exchange Presentation

Atlanta, GA

May 26, 2011

Paul Dixon (ASCEM Multi-Laboratory Program Manager)

Advanced Simulation Capability for Environmental Management (ASCEM)

- A State-of-the-art **tool** for predicting contaminant fate and transport through natural and engineered systems
- The **modular and open source** design will facilitate a **new approach** for integrated modeling and site characterization
- Will enable robust and standardized future performance and risk assessments **for EM cleanup and closure**

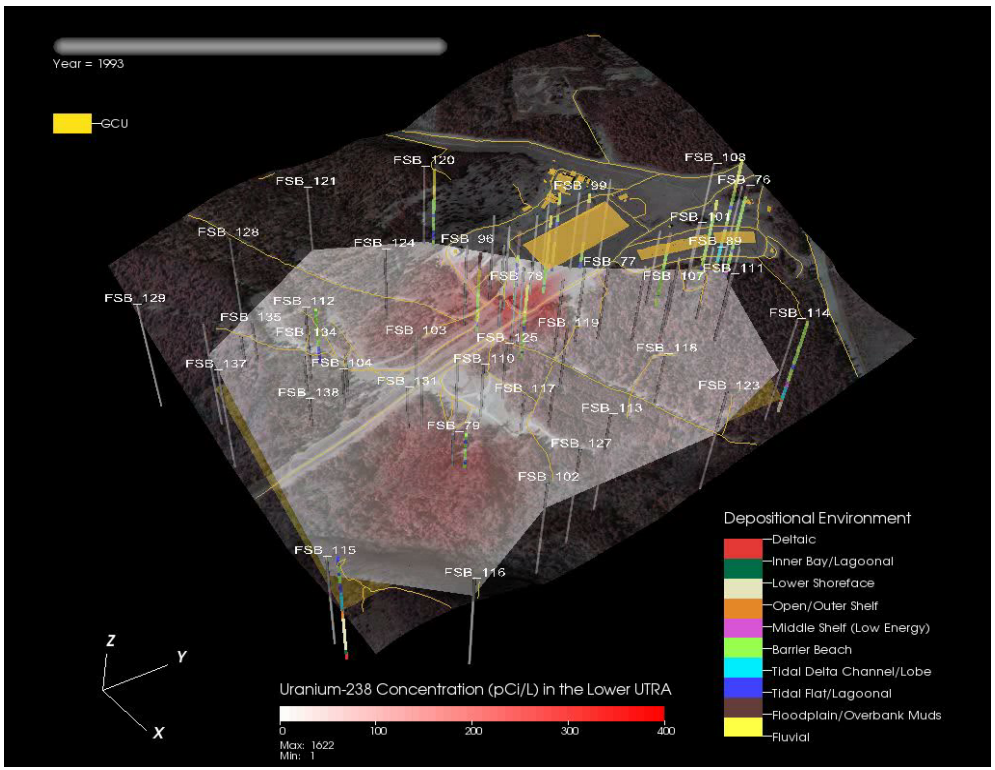

Click image to play

ASCEM

ascemdoe.org

Print

Close

ASCEM Challenge and Impact

Challenge

- **Reduce time required and financial cost of remedial actions** at sites within EM complex by providing scientifically defensible modeling and simulation tools that accurately address complex environmental management situations
- **Develop an integrated, high-performance computer modeling capability** to simulate multiphase, multi-component, multi-scale flow and contaminant transport, waste degradation and contaminant release, including
- **Provide tools for decision making:** parameter estimation, visualization, uncertainty quantification, data management, risk analysis, and decision support
- **Leverage investments** made by SC, NE, RW, and FE as well as other Federal agencies to capitalize on significant investments and reduce the lifecycle development time and costs

Impact

- Near-term: ***technically underpin*"** existing site RA's and PA's
- Inform strategic data collection for model improvement
- **Scientifically defensible and standardized EM** RA's and PA's

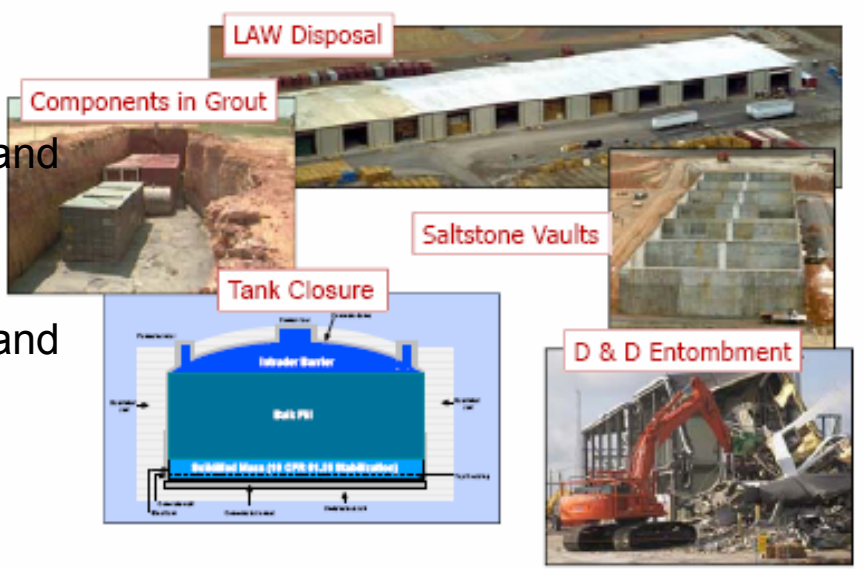

ascemdoe.org

ASCEM Organized Around Three Thrust Areas

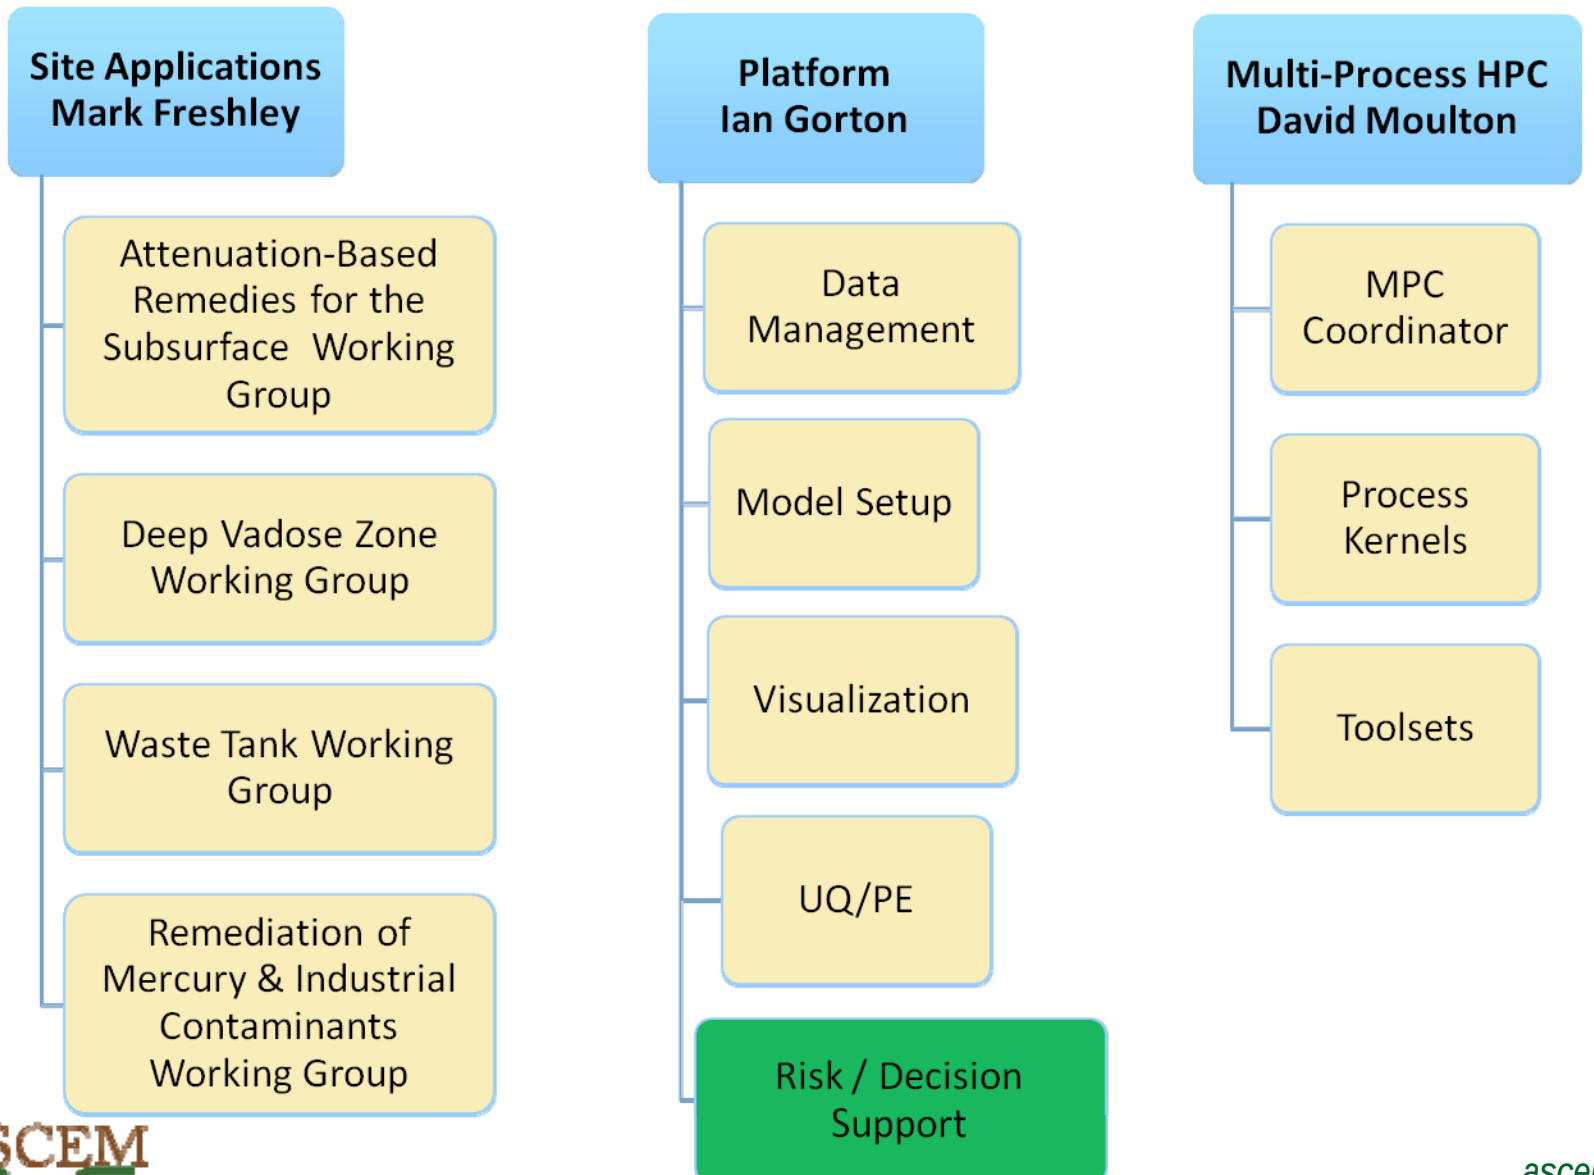

ASCEM

ascemdoe.org

High Performance Computing

- **The ASCEM HPC simulator, Amanzi, will allow for flow and reactive transport on both structured and unstructured grids, and include physical processes such as:**

- Biochemical Reaction Processes
- Thermal Effects
- Radioactive decay
- Mechanical Effects
- Source Term Degradation
  - Cementitious waste and structures
  - Waste tanks and metal wastes
- Transport of Colloids (*future work*)

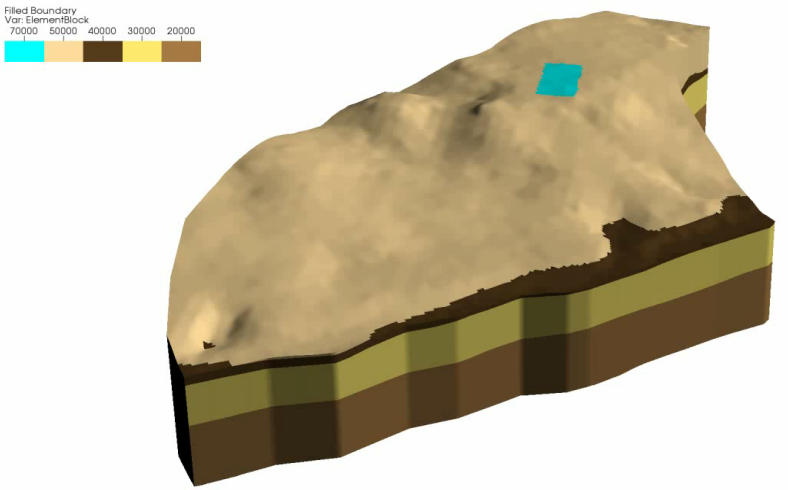

Click image to play





Wide Range of Complexity



Wide Range of Platforms

ascemdoe.org

Print

Close

Platform and Integrated Toolsets

ASCEM will include capabilities for:

- Model Setup
- Data Management
- Uncertainty Quantification
- Visualization
- Parameter Estimation
- Decision Support
- Risk Analysis

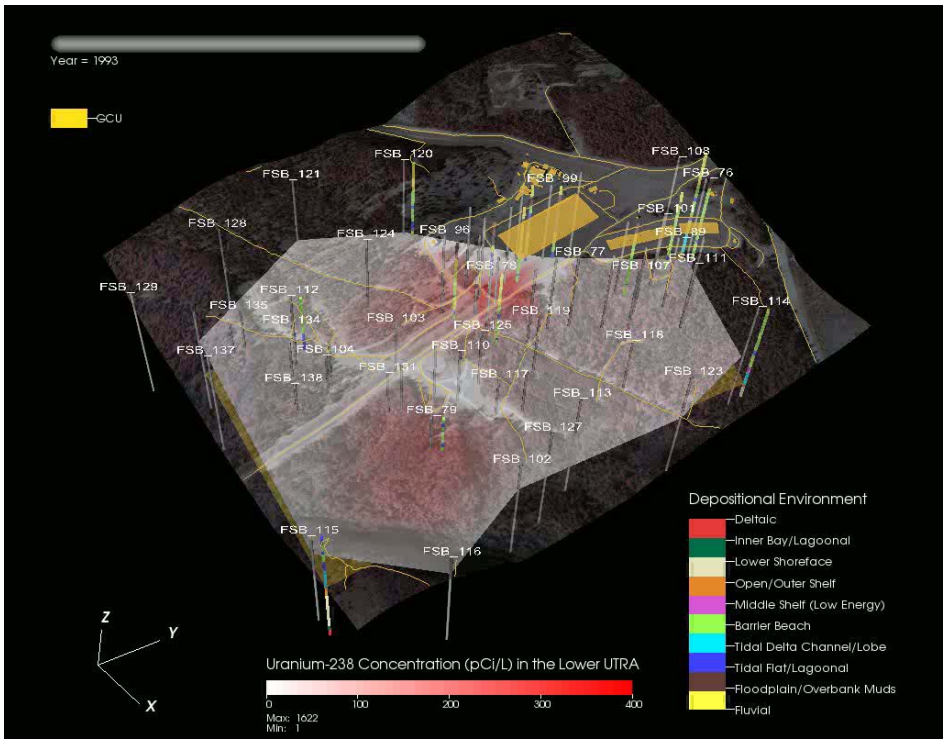

These tools will allow users to quickly and efficiently create and analyze simulation data assisting highlighting relevant processes and parameters allowing for informed decision making.

ASCEM

ascemdoe.org

Print

Close

Site Applications Scope

- Provide site data for model development, testing and validation
- Conduct demonstrations of the Platform and HPC simulator
- Establish and maintain interfaces with end users
- Solicit input to requirements specification and development activities

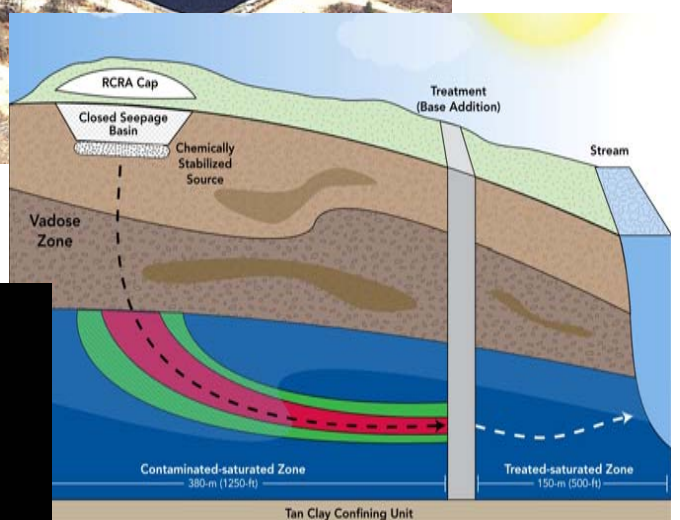

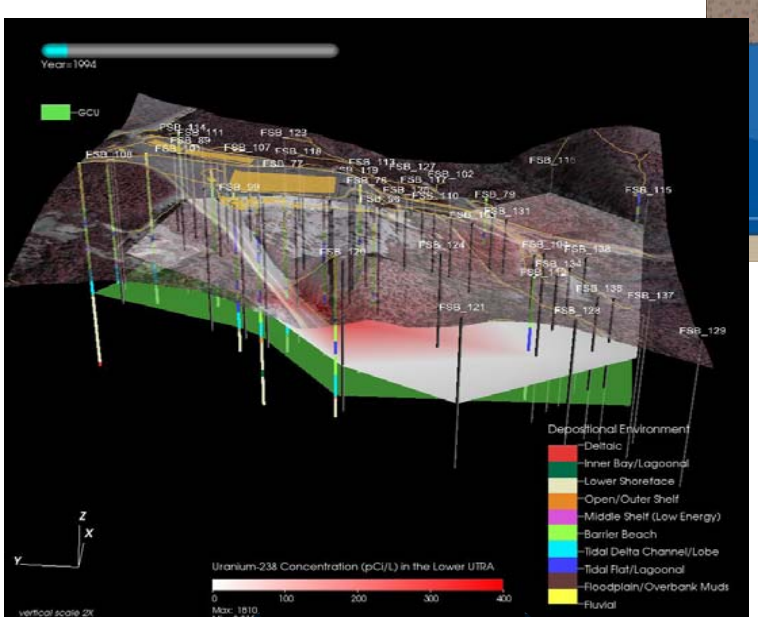

ASCEM

ascemdoe.org

Print

Close

User Interactions Helped Shape ASCEM Development

- **Engaged DOE EM end users**
  - Performance Assessment Community of Practice and Low Level Waste Disposal Facility Federal Review Group meetings
  - Interviews at Hanford, Oak Ridge, Portsmouth/Paducah, and Savannah River sites
  - Consulted National Laboratories

- **Used recommendations as early input to requirements**
  - A graded approach is needed
  - Consider role of modeling as input for regulatory decision making
  - Take advantage of HPC to reduce need for simplifications
  - Recognize data needs as model complexity increases

User Steering Committee

- Chartered in October 2010, first formal meeting on January 24, 2011
- Objective to enhance the potential for successful implementation of ASCEM tools by encouraging input from management and key staff at contractors, regulators and DOE oversight organizations
- **Membership:**

Michael Graham, Chair	LANL, Environmental Programs	Bruce Crowe	NNSS, EM Science Advisor
Chris McKenney	US NRC, PA Branch Chief	Elizabeth Phillips	DOE Oak Ridge
Marty Letourneau	EM-41, LFRG Chair	Tom Gaughan/Cathy Lewis	SRNS, Area Closure Projects
Andrew Wallo III	DOE HS-20	Mark Layton	SRR, Tank Closure PA
Pat Nakagawa	LANL, Environmental Programs	Karthik Subramanian	URS
Cheryl Whalen	Washington Dept. of Ecology	Rich Bonczek	DOE PPPO, LFRG Representative
Alaa Aly/Moses Jaraysi	CHPRC, Modeling Integration	Frank DiSanza	DOE NNSS, LFRG Representative
Susan Eberlein	WRPS, Tank Closure PA	Roger Seitz, Coordinator	SRNL, Performance Assessment

User Steering Committee Recommendations

- Clearly articulate near-and longer-term objectives and establish metrics for success
- Focus on identifying a set of near-term positive impacts (e.g., targeted applications, visualization tools, guidance on uncertainty quantification)
- Maintain focus on fit-for-purpose toolset designed to support EM-related decision-making during and at the end of the modeling process
- Enhance sustainability by engaging in an annual work planning process that considers contractor and regulatory schedules for modeling and supporting activities around the DOE Complex
- Look for opportunities for demonstrations at small and large DOE sites beyond Applied Field Research Sites, Science Focus Areas and Integrated Field Research Challenges

ASCEM Leveraging

- In addition to primary ASCEM code development, significant leveraging of investments by Advanced Simulation and Computing (ASC /DOE NNSA) and Advanced Scientific Computing Research (ASCR/DOE SC)
- **Examples include:**
  - VisIt – visualization and graphic analysis tool developed by ASC and ASCR SciDAC Program
  - Velo: Data Management
  - PSUADE – uncertainty analysis tool developed by ASC
  - Trilinos Framework – services for parallel programming and integrated software packages developed by ASC and ASCR SciDAC program
  - PETSc – Portable, Extensible Toolkit for Scientific Computation developed by ASCR SciDAC Program
  - BoxLib – parallel AMR framework developed by ASCR Base Math and SciDAC
  - MFD – Mimetic Finite Difference discretization methods developed by ASCR Applied Mathematics Program
  - Geochemistry Toolset – Use algorithms developed by computational scientists funded through DOE SC

ASCEM Coordination with other DOE offices

- As the request of Under Secretary Christina Johnson a workshop was held in September 2010 to investigate possible leveraging with Fossil Energy's NRAP program. (Report available on ASCEM website)
- At the request of EM-1 and acting NE-1, a workshop was held in February 2011 to investigate possible leveraging with Nuclear Energy's NEAMS program. (The workshop report is in development and expected to be finalized in late May 2011)
- Continue to work with the Office of Science to insure maximum leveraging between the two programs. Science is requiring all SFA, IFRC and SciDAC proposal renewals and new proposal include a strong tie to ASCEM. Started joint data management initiative between SC and EM.

ASCEM/NEAMS Workshop

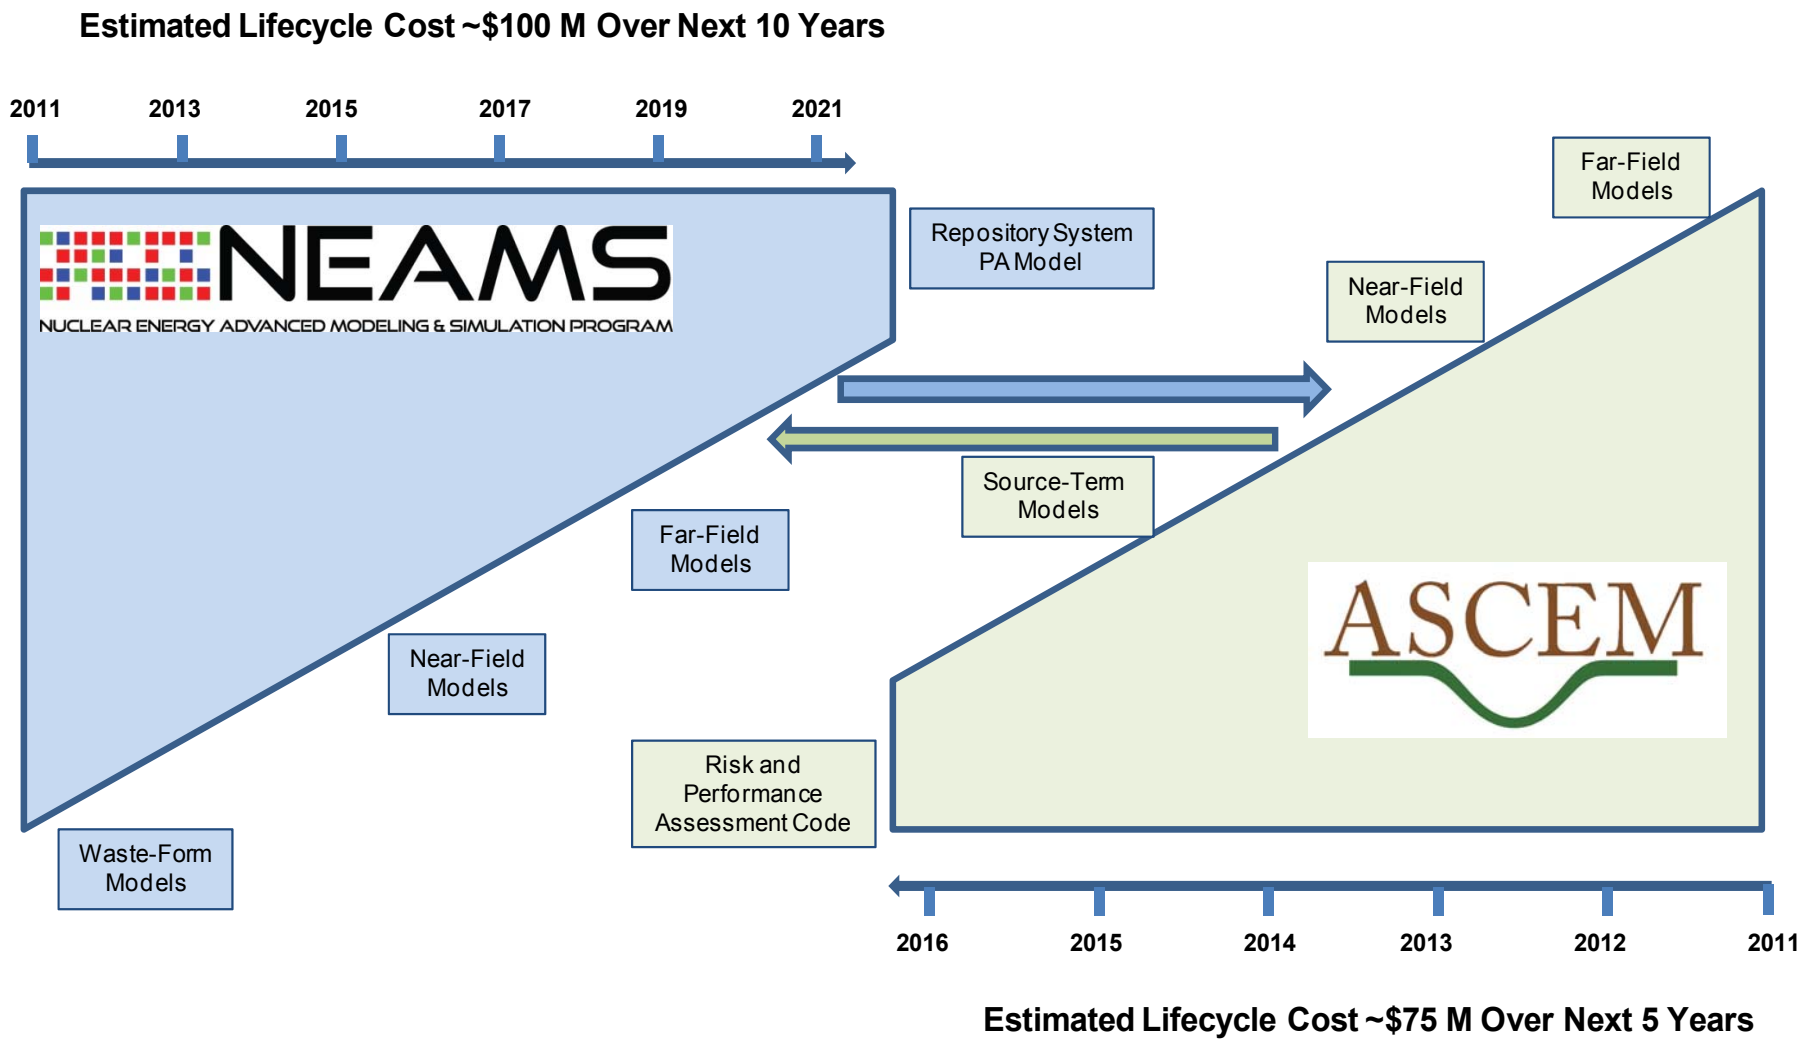

ASCEM/NEAMS Workshop

NEAMS Timeline

2011 → 2012 → 2013 → 2014 → 2015 → 2016

NEAMS
NUCLEAR ENERGY ADVANCED MODELING & SIMULATION PROGRAM

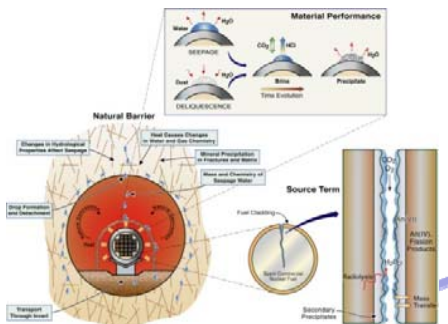

Risk and Performance Assessment Code

Far-Field Models

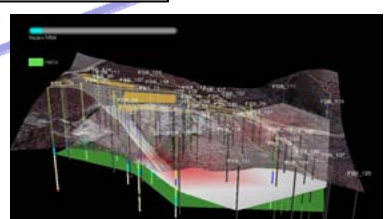

Near-Field Models



Waste-Form Models

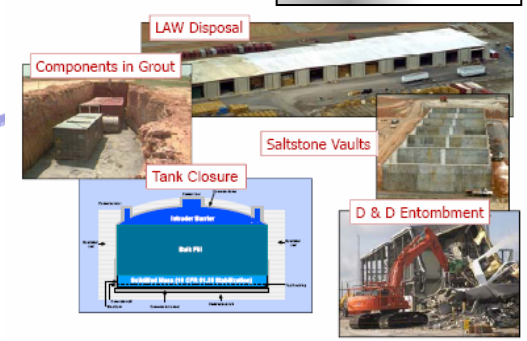

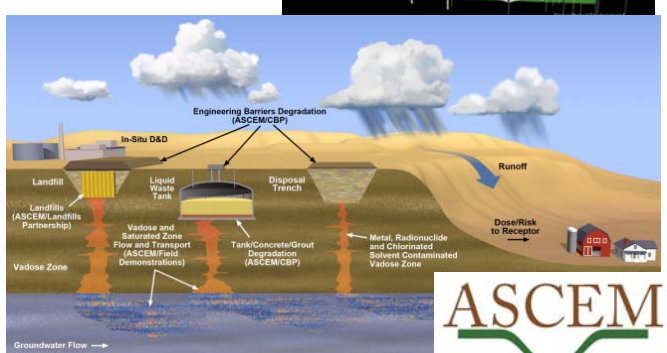

ASCEM

2016 ← 2015 ← 2014 ← 2013 ← 2012 ← 2011

ASCEM Timeline

ASCEM

ascemdoe.org

Print

Close

ASCEM Relationship to the AFRCs

- ASCEM Site Applications engages AFRCs through Working Groups
- Active interfaces include Deep Vadose Zone and Attenuation-Based Remedies for the Subsurface AFRCs
- Remediation of Mercury and Industrial Contaminants Working Group in planning stage

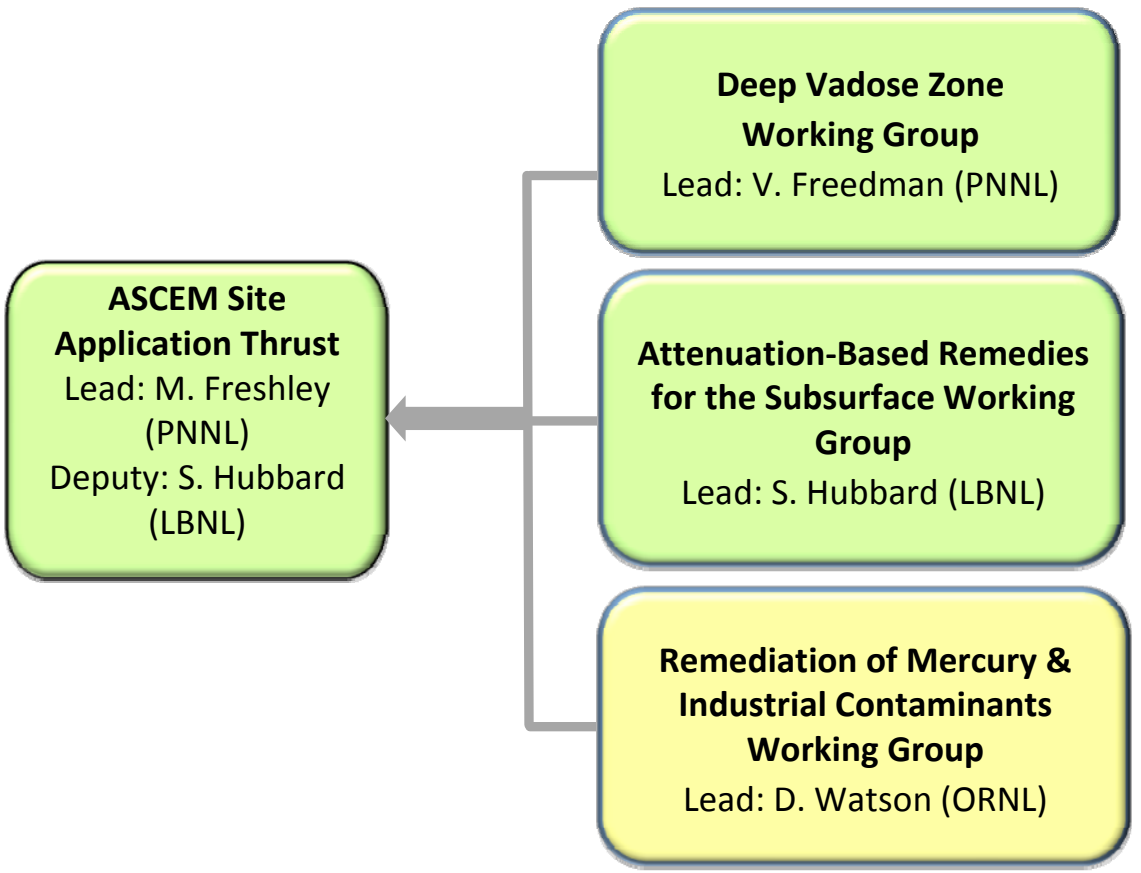

ASCEM FY2010 A Year in Review

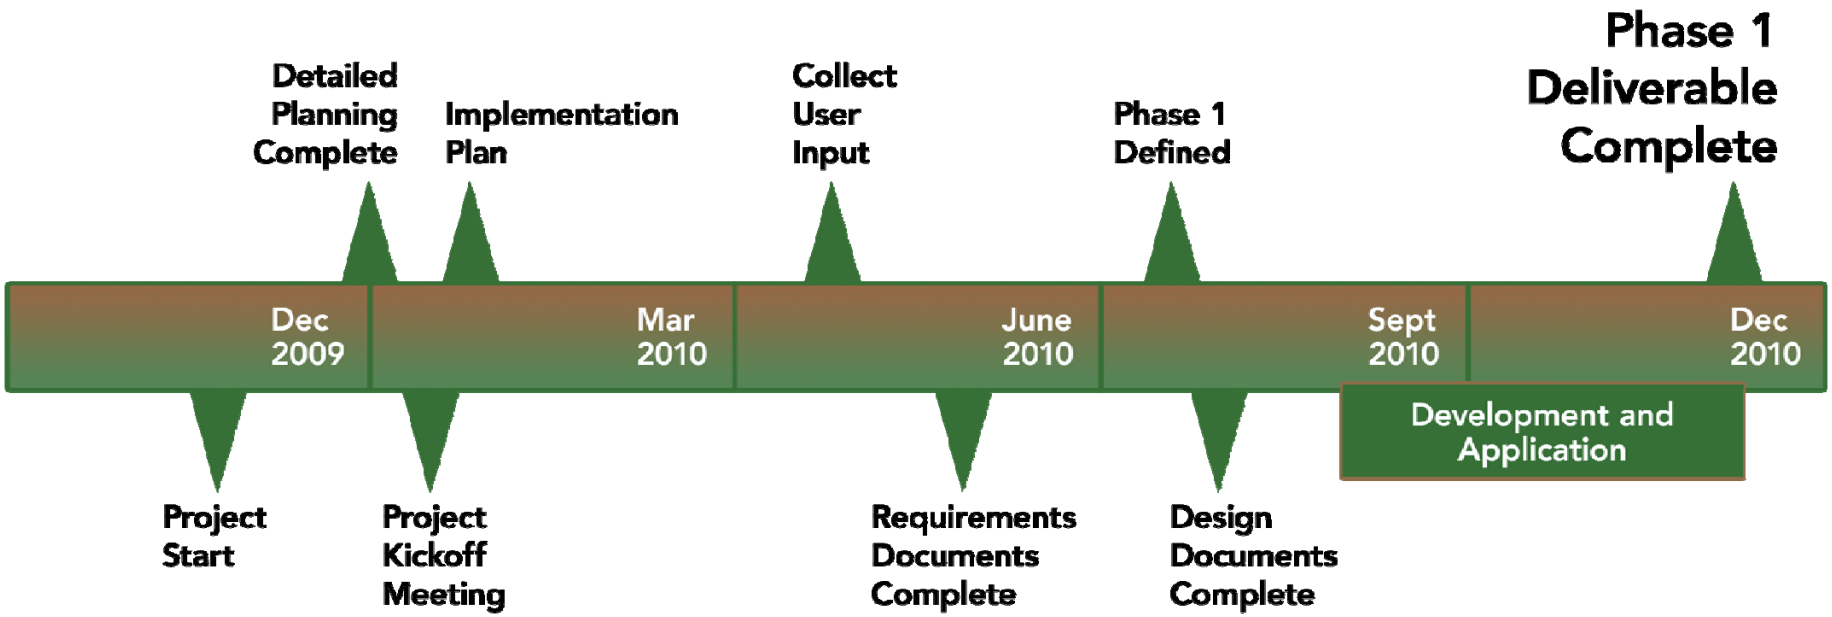

- ✓ Initiate technical part of Project after January 2010 kickoff meeting
- ✓ Completed assembly of team, extensive work planning, requirements definition, and design
- ✓ Engaged a broad spectrum of end users for input to requirements and design
- ✓ Performed Phase 1 demonstration at Savannah River Site F Area
- ✓ Assembled open source components over four months to support Phase I demonstration
- ✓ Developed a new open-source HPC Simulator in four months:
  - leveraged and enhanced existing open-source tools and the Trilinos framework
  - implemented several key components from scratch
- ✓ Executed simulations on supercomputers at NERSC

ASCEM

Quality Assurance Graded Approach with Code Development

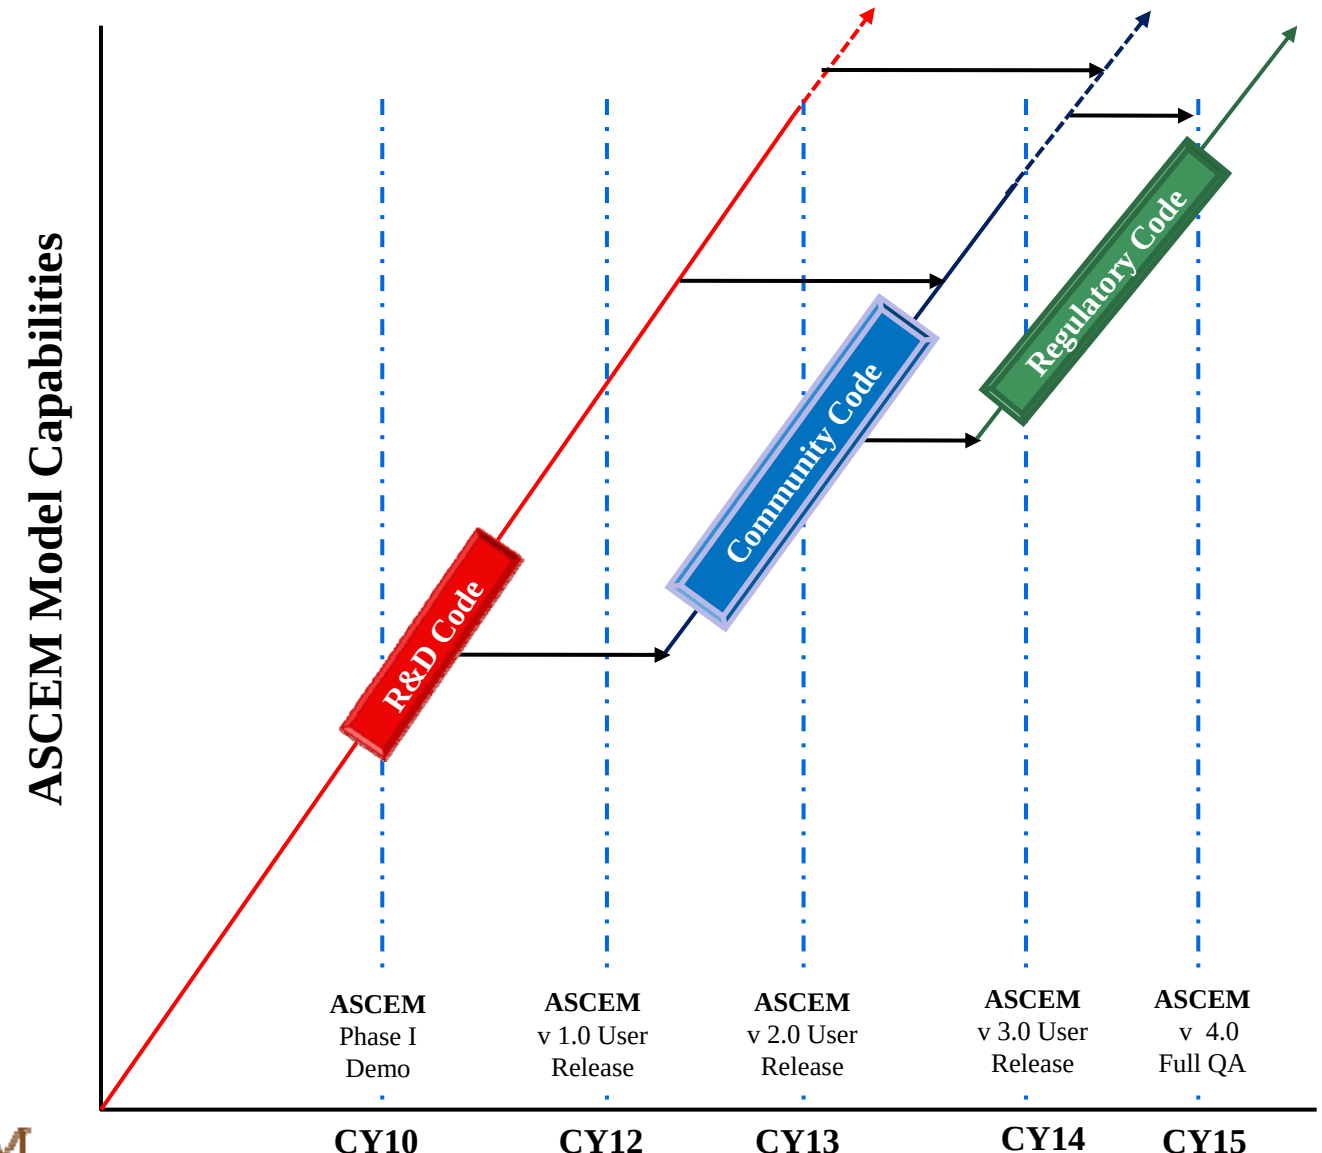

ASCEM

ascemdoe.org

Print

Close

ASCEM Lifecycle Plan

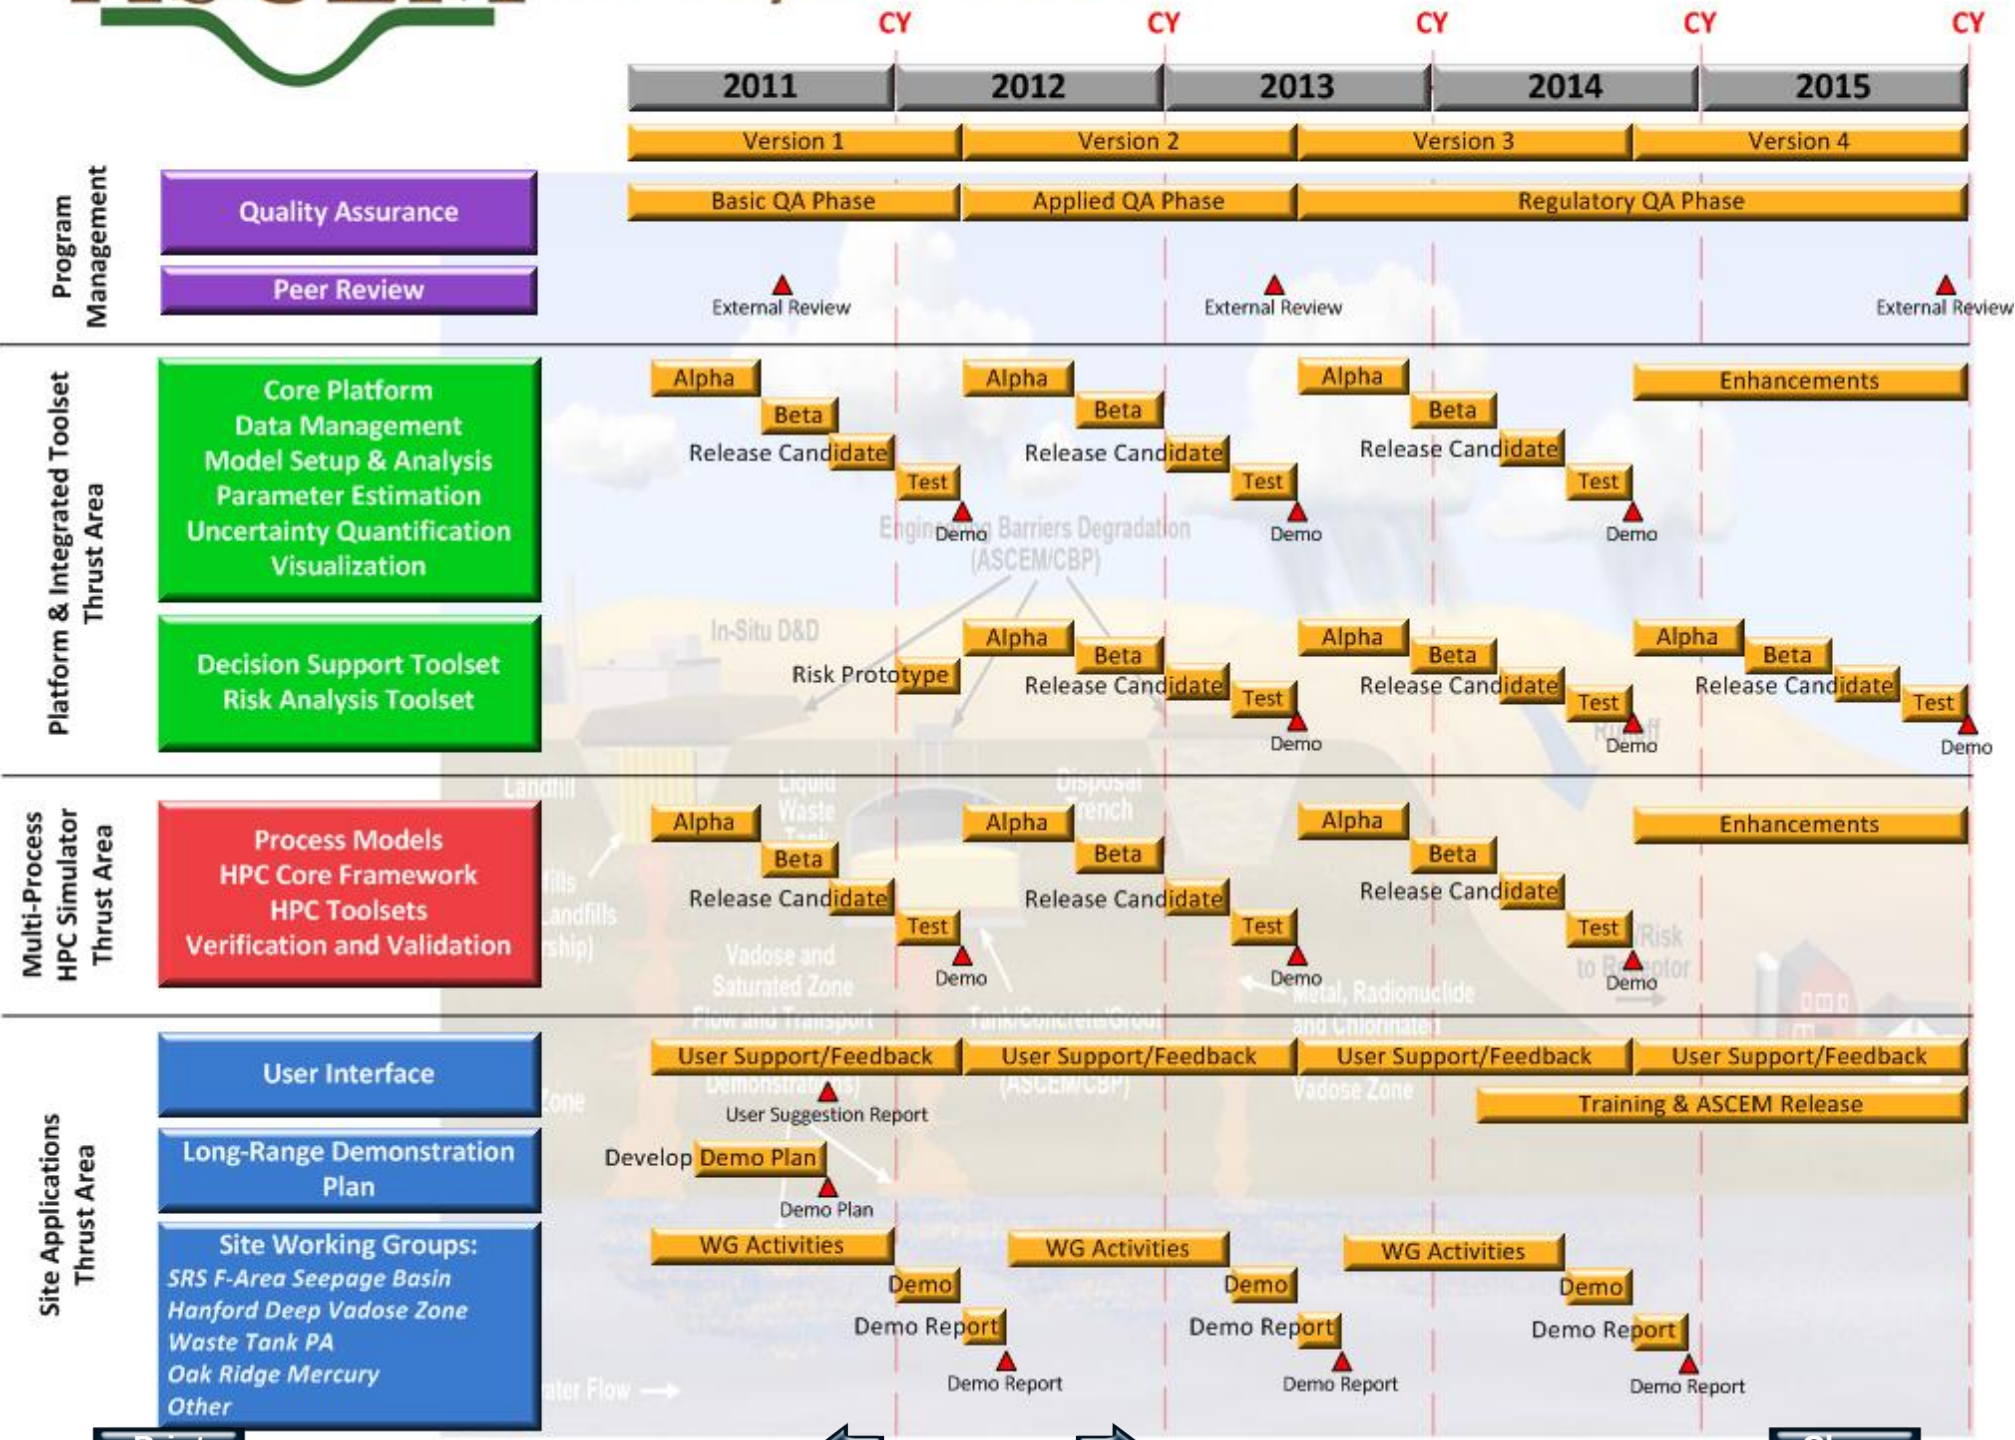

Print

Close

ASCEM 2010 to 2015 Program

- **2010 Prototype: Demonstration of individual ASCEM modules**
  - *Impact: Engage end users in development of prototype integrated, open source PA capability*
- **2011-2012 ASCEM Version 1: Integration of ASCEM Modules**
  - *Impact: First prototype of an integrated, open source simulation capability for EM demonstrated*
- **2013 ASCEM Version 2: Applied Phase and End User Engagement**
  - *Impact: Version 2.0 of an integrated, open source simulation capability released to science and EM community for application*
- **2014 ASCEM Version 3: Applied Phase and Initiation of Regulatory Quality Assurance V&V Testing**
  - *Impact: Version 3.0 of integrated, open source simulation capability demonstrated*
- **2015 ASCEM Version 4: Regulatory Code Release and Training**
  - *Impact: Fully integrated, open source simulation capability released and maintained*

Looking forward: FY 2011 Work Scope Details

- Focus on product development and integration of components for ASCEM User Release 1.0 and Phase II Demonstration
- Conduct technical peer review in FY11
- Continue working groups for SRS F Area, Hanford Deep Vadose Zone, and Waste Tank Performance Assessment
- Continue interactions with EM Performance Assessment Community, DOE SC SBR, FE-NRAP, and NE-NEAMS/Repository Programs
- Strengthen linkages with DOE EM small sites (LANL established; West Valley, Paducah/Portsmouth, Grand Junction, Nevada Test Site and Brookhaven)
- Strengthen integration of ASCEM with the EM-32 Applied Field Research Centers

Questions

Data Management Phase I Accomplishments: Interactive Map of Wells for Each Aquifer

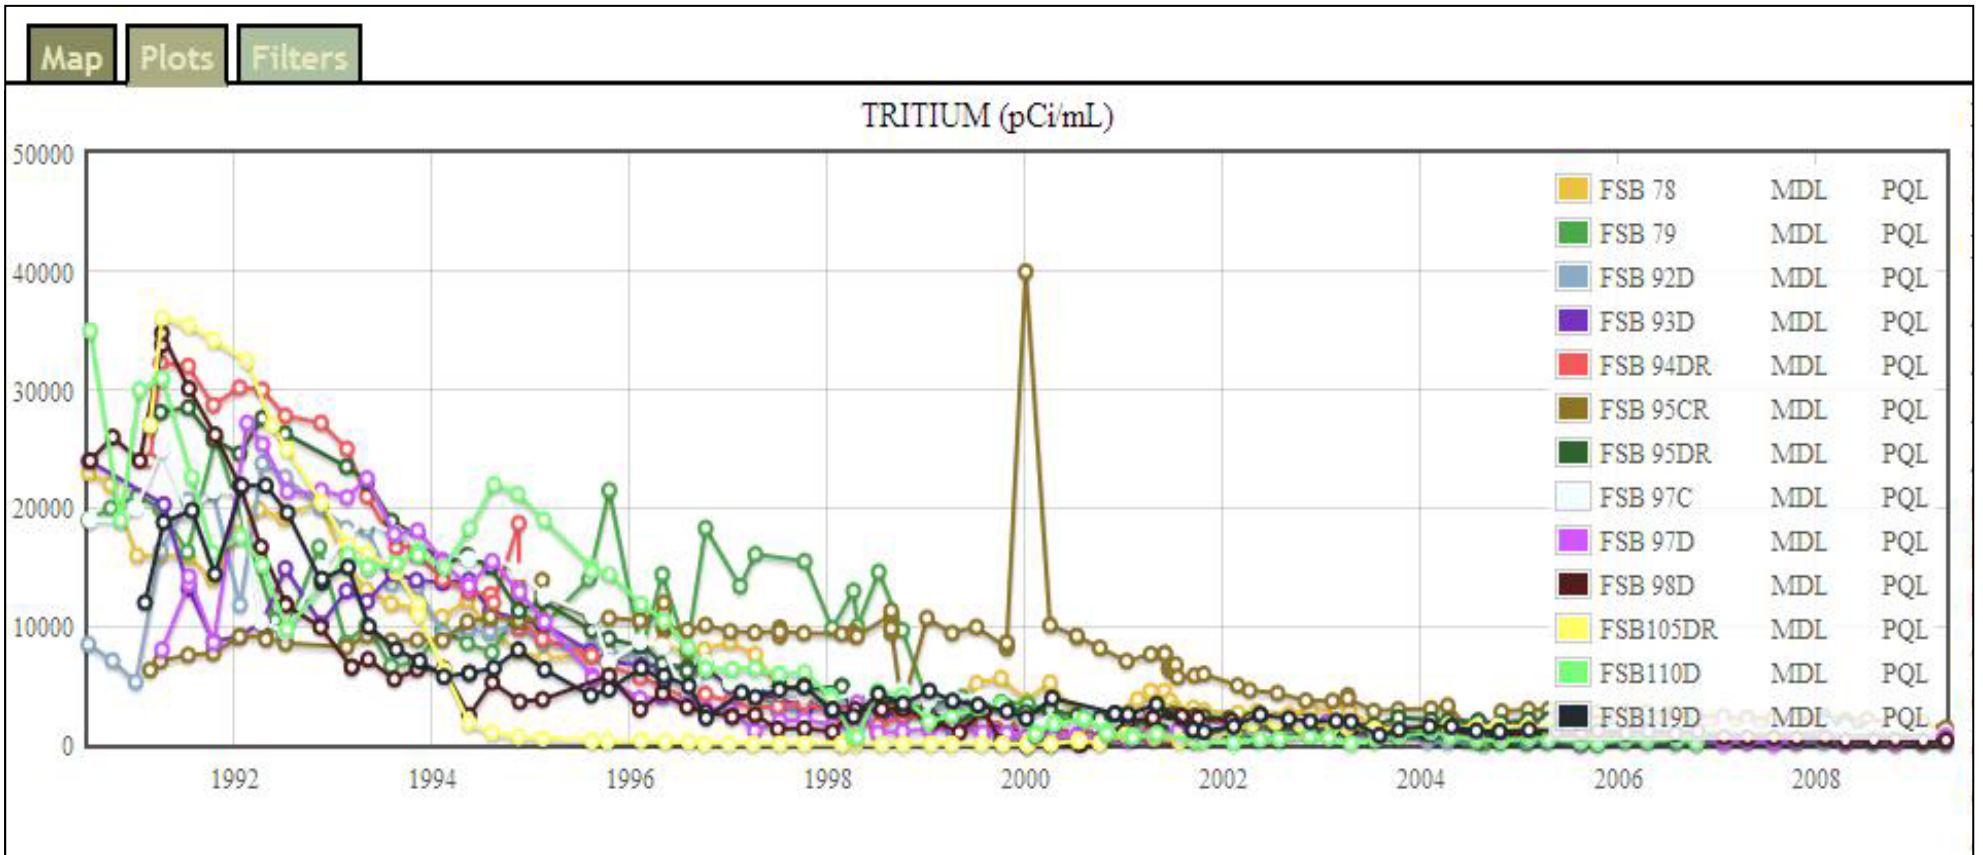

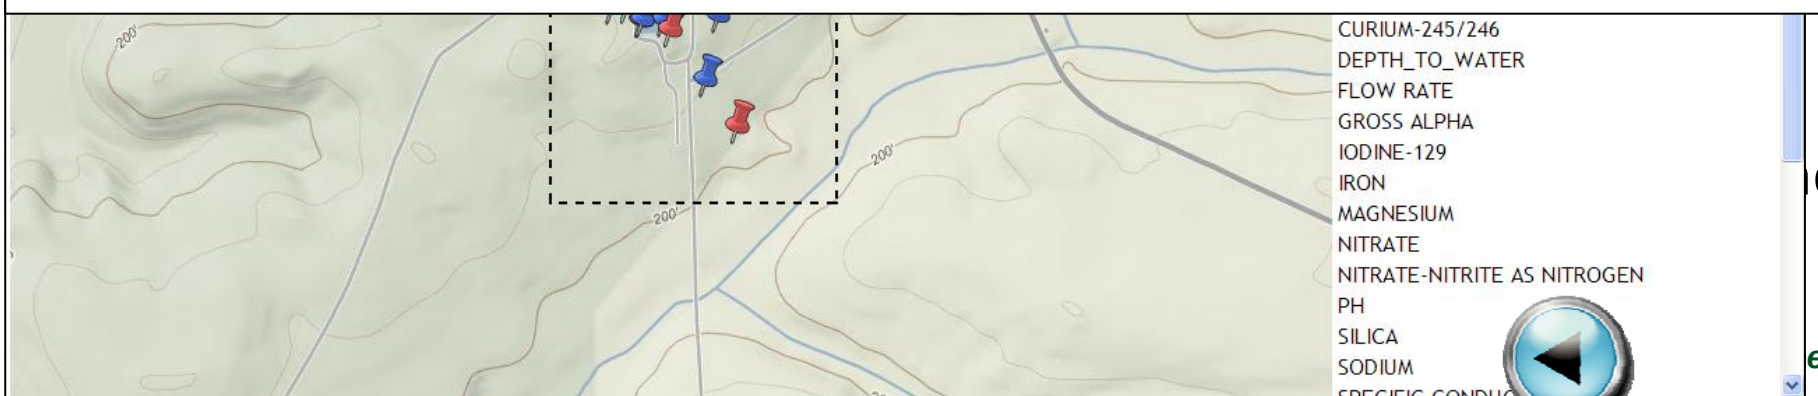

d a

e.org

Print

Close

Uncertainty Quantification Demo

ASCEM

ascemdoe.org

Print

Close

Uncertainty Quantification Phase I Accomplishments

PARAMETERS VARRIED

Sour

Chen

Cl, F

Basi

Sedi

Surfa

- G
- K
- S
- S
- S
- S

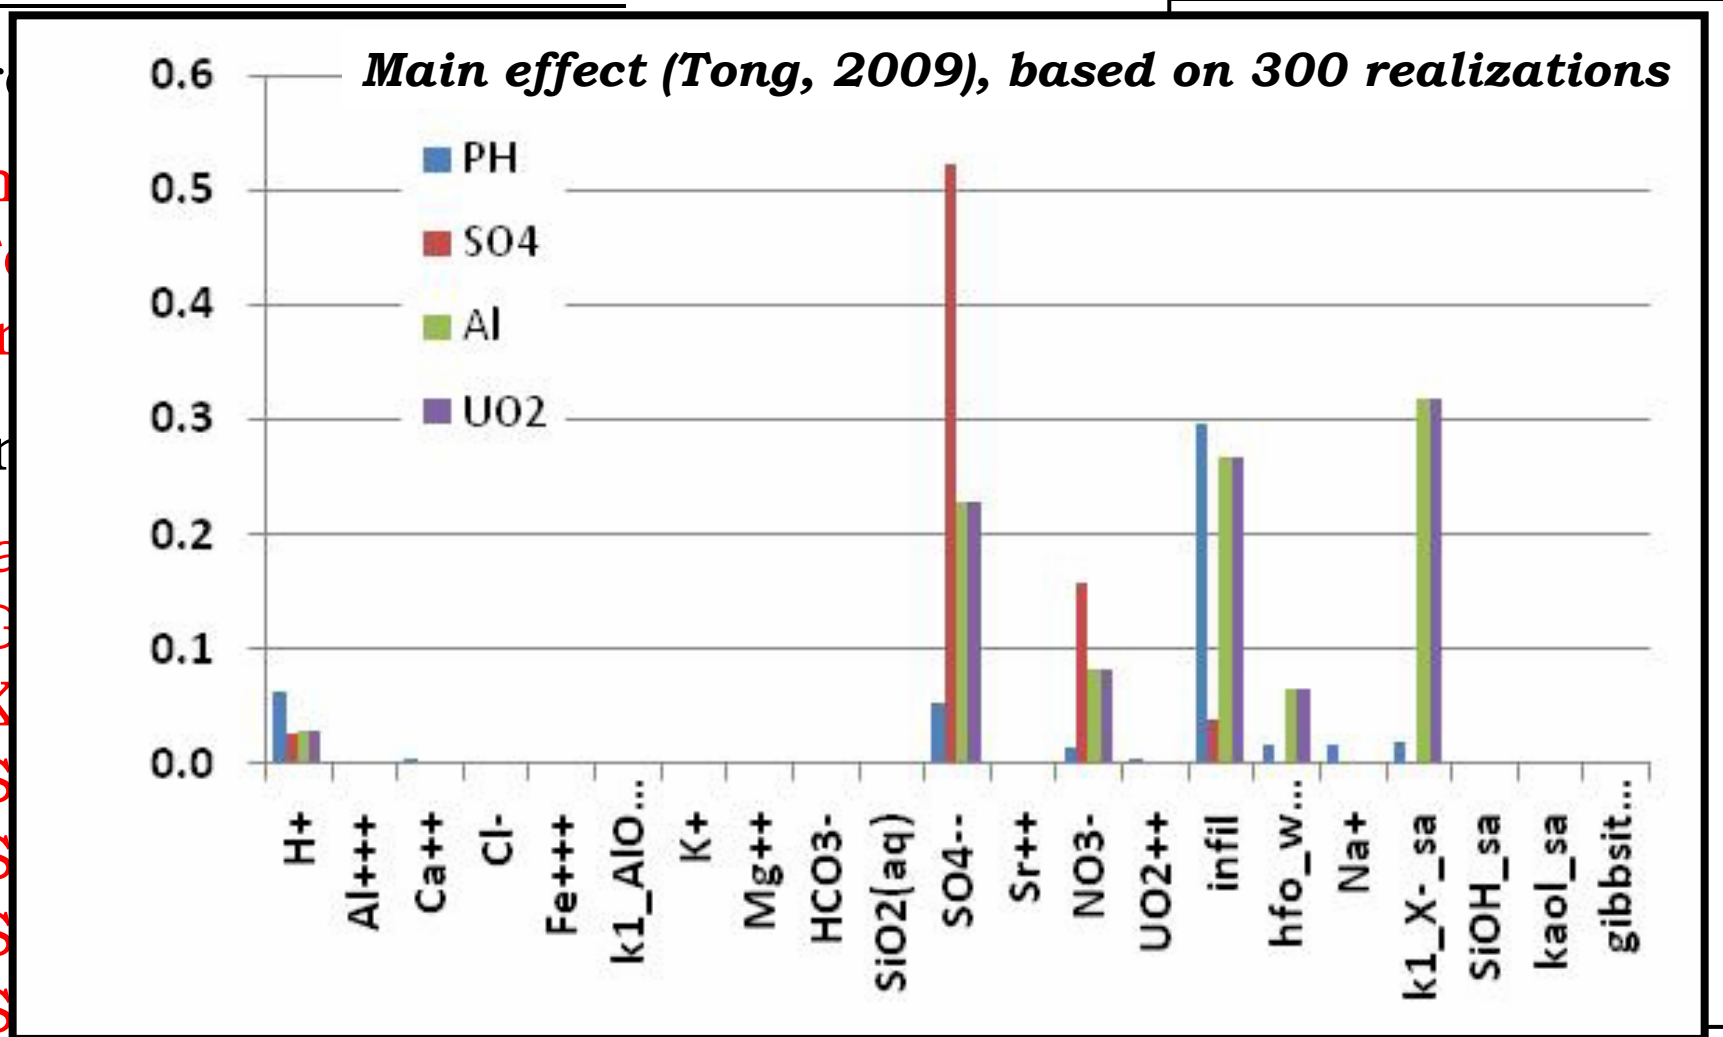

Tan Clay Confining Unit

ascemdoe.org

Print Close

Visualization Demo

ASCEM

ascemdoe.org

Print

Close

Initial Desiccation Test Geophysical Monitoring

Preliminary Electrical Resistance Tomography Characterization

- In the vadose zone, electrical resistivity is primarily governed by porosity, saturation, pore fluid conductivity, and to a lesser degree temperature.
- Pre-desiccation ERT images of the site are shown in two different views above (middle and right).
- Higher conductivity lenses (warmer colors) are diagnostic of finer grained materials with higher saturations and fluid conductivities.

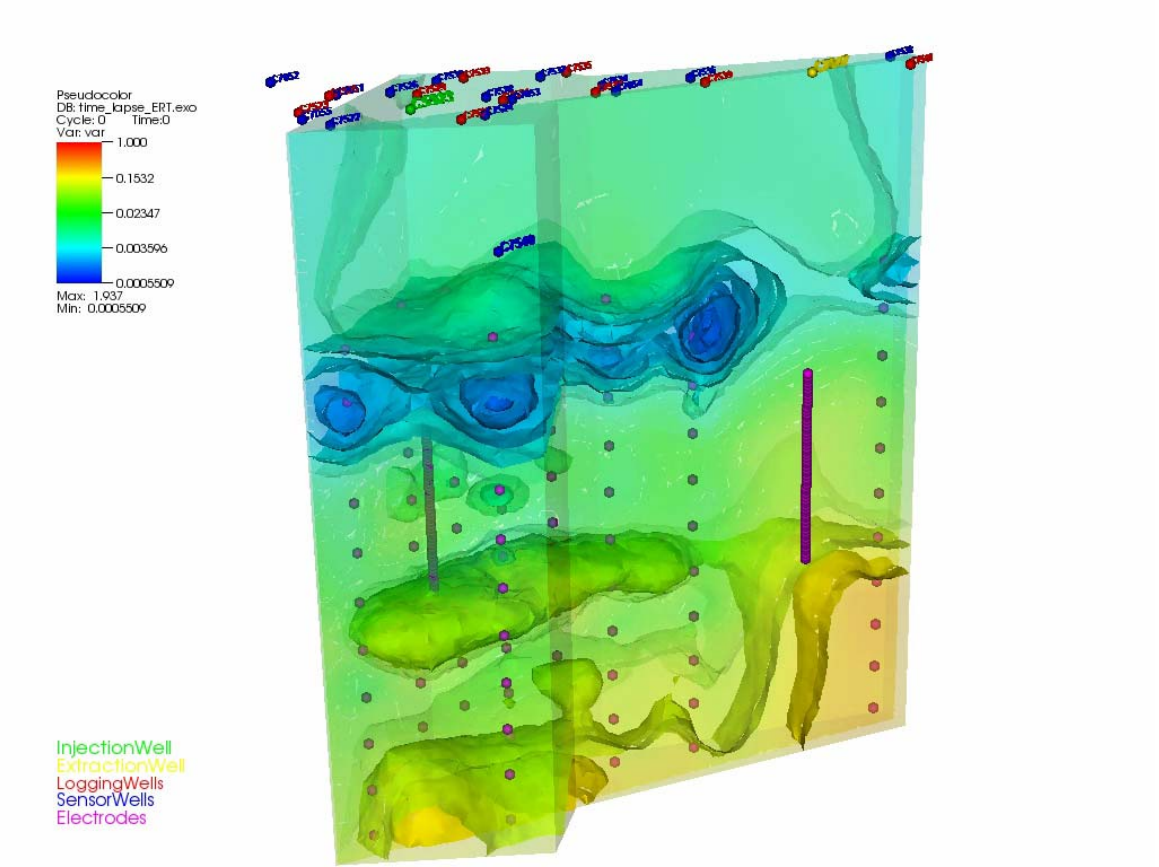

ASCEM

ascemdoe.org

High Performance Monitoring: 3D time-lapse desiccation imaging at the BC Cribs Area

- The time-lapse images above show the change in 3D subsurface conductivity during desiccation in terms of percent change from background.
- The changes in conductivity are caused by decreases in saturation during desiccation

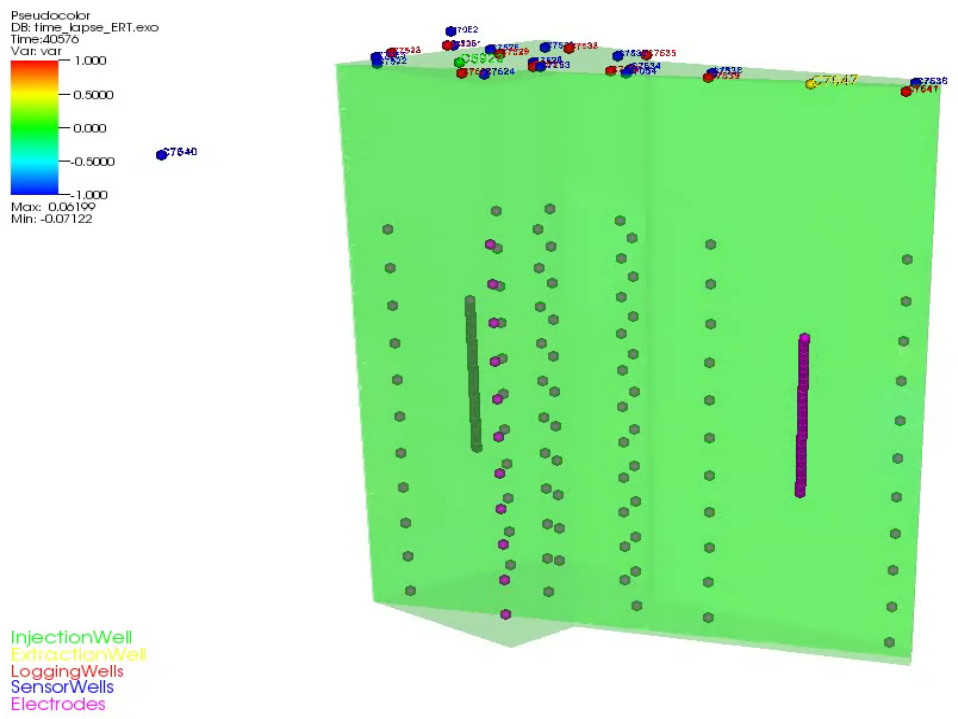

Click image to play

Back to Presentation

ASCEM

ascemdoe.org

Print

Close